CI60V

24” Built-In 4-Zone Induction Cooktop

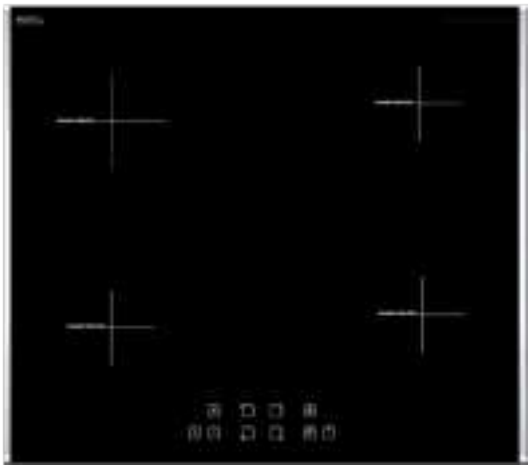

Four Zones | Touch Control | Pause | Power Boost | Slim Installation

AVAILABLE FINISHES / COLOUR OPTIONS

CI60V
Black Ceramic Glass with Stainless Steel Side Edges and bevelled front / back

KEY FEATURES

Black Ceramic Glass Surface
P&C cooktops are designed to be scratch-resistant and effortless to clean, these cooktops offer a seamless aesthetic that contributes to a clean, modern kitchen ambiance. The minimalist design enhances the overall appeal, complementing any kitchen decor with its contemporary style.

Induction Zones
Electromagnetic heating technology where heat is generated inside your cookware, ensuring a more efficient process with less energy waste, faster heating, and a safer cooking experience

Precise Control
P&C cooktops feature user-friendly touch controls with LED indicators that are practical and allow for precise temperature settings.

9 Power Levels With Power Boost
This cooktop offers nine power levels for each zone and Power Boost to add even more power that speeds up the cooking process.

Residual Heat Indicators
When the cooking zone is not cool enough to touch safely, the residual heat indicators warn you with a visible red indicator on the cooktop surface.

Automatic Shutoff
If a cooking zone is in use for a certain period of time with no changes to the control setting, the burner will automatically turn off to prevent unsupervised heating.

GENERAL PROPERTIES	
Type	Induction Cooktop
Cooking Surface	Black ceramic glass surface
Cooktop Frame	Stainless steel side edges, beveled front and back
Number of Elements	4 Induction cooking elements
Shallow Depth Installation	Allows for easy install over drawers or ovens
CONTROLS	
Type	Electronic touch controls
Location	Front center
FEATURES	
Power Levels	9 with Power Boost
Control Panel	Smooth touch / LED display
Quick Heating Elements	Yes
Automatic Shut Off	Yes
Pause Function	Yes
Count Down Timer	Yes
Hot Surface Indicator	Radiant heat indicators
Child Lock	Yes
ELEMENT PERFORMANCE	
Front Left Element	1,400W / Power Boost: 1,800W
Back Left Element	2,100W / Power Boost: 2,500W
Back Right Element	1,400W / Power Boost: 1,800W
Front Right Element	2,100W / Power Boost: 2,500W
ELEMENT SIZE	
Dimensions of Front Left Element	$6^{5/16}$” (160mm)
Dimensions of Back Left Element	$7^{7/8}$” (200mm)
Dimensions of Back Right Element	$6^{5/16}$” (160mm)
Dimensions of Front Right Element	$7^{7/8}$” (200mm)
TECHNICAL DETAILS	
Electrical Supply	208-240 V / 60Hz / 7400W
Max. Amp Load	40 Amp
Power Cord	*Supplied with a 5ft electrical cable and must be hardwired
PRODUCT DIMENSIONS	
Width (In/mm)	$23^{1/4}$” (590mm)
Height (In/mm)	$2^{3/16}$” (56mm)
Depth (In/mm)	$20^{1/2}$” (520mm)
CUT OUT DIMENSIONS	
Width (In/mm)	$22^{1/16}$” (560mm)
Height (In/mm)	min. $3^{1/8}$” (80mm)
Depth (In/mm)	$19^{5/16}$” (490mm)

Notes: Porter & Charles reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Warranties: Please see the Use & Care manual or Porter & Charles website for a statement of limited warranty. For more information on our entire line of products, go to www.porterandcharles.ca or call 905.829.3980 © Porter & Charles. All rights reserved.

CI60V

Installation Details

PRODUCT DIMENSIONS - W / H /D (INCH/MM)

23 1/4" / 2 3/16" / 20 1/2"

590mm / 56mm / 520mm

CUT OUT DIMENSIONS - W / H /D (INCH/MM)

22 1/16" / min. 3 1/8" / 19 5/16"

560mm / min. 80mm / 490mm

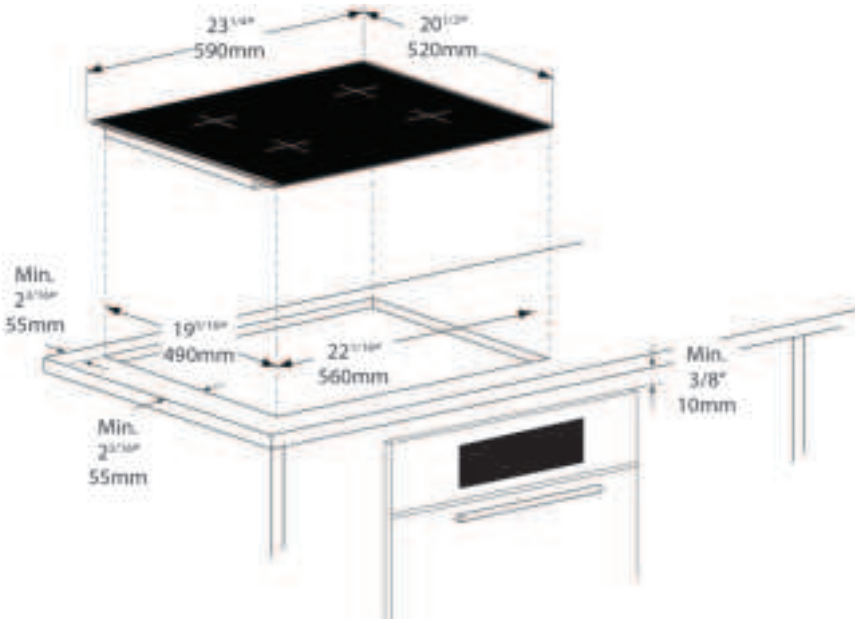

*NOTE

- Minimum distance from the cooktop cut-out to the wall: 2 3/16" (55mm)
- Minimum distance from the cooktop cut-out to side wall: 2 3/16" (55mm)
- Min. Distance between the surface of the cooktop and the underside of the exhaust hood: 30" (762mm)

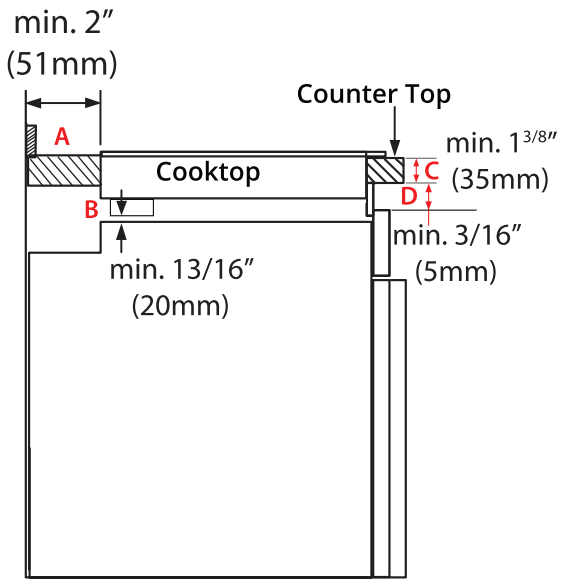

*NOTE

A. 2" (51mm) Rear wall clearance is required.
B. There must be a minimum of 13/16" (20mm) of space between the bottom of the cooktop and the oven to allow air to flow.
C. Allow for a minimum of 1 3/8" (35mm) from the countertop front edge to the edge of the cutout.
D. A minimum of 3/16" (5mm) is required for the vent opening. If there is insufficient airflow, the appliances life span will be shortened.

RECOMMENDED CABINET MINIMUM CLEARANCE

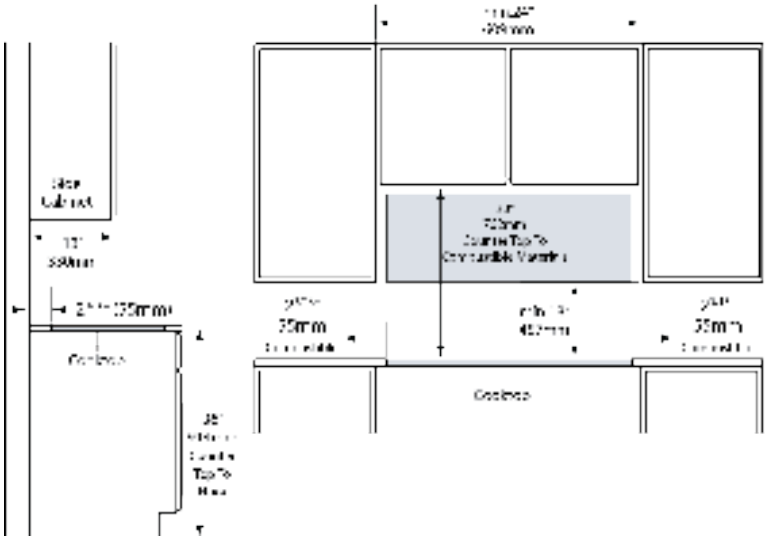

UNDERNEATH COOKTOP DIMENSIONS

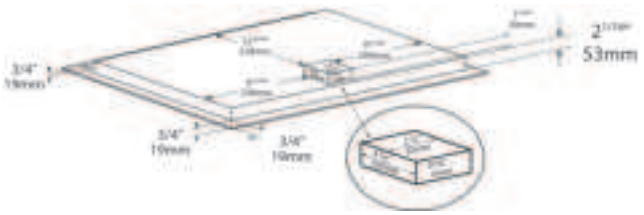

Notes: Porter & Charles reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Warranties: Please see the Use & Care manual or Porter & Charles website for a statement of limited warranty. For more information on our entire line of products, go to www.porterandcharles.ca or call 905.829.3980 © Porter & Charles. All rights reserved.

WARRANTY INFORMATION

Porter & Charles Appliances are designed and manufactured to the highest standards. Each appliance is covered by a comprehensive 2-year parts and labour warranty. Refer to product warranty policy for complete terms and conditions.

FOR PARTS & SERVICE

Euro-Parts & Service
39822 Belgrave Road, Belgrave, ON. N0G 1E0 1 866 722 2262
www.euro-parts.ca • parts@euro-parts.ca • service@euro-parts.ca

Porter & Charles appliances are imported and distributed in North America by Euro-Line Appliances Inc. For more information, please visit one of our showrooms or www.ela.ca

EURO-LINE APPLIANCES INC.

871 Cranberry Court, Oakville, ON
L6L 6J7 Canada
905.829.3980
1-800.421.6332
info@ela.ca

EURO-LINE APPLIANCES INC.

101-1014 Homer Street, Vancouver, BC
V6B 2W9, Canada
604.235.3980
1-855.ELA.WEST (352.9378)
infowest@ela.ca